



DEVICE NUMBER : DIS-033-071 REV : 1.1
ECN : _____ PAGE : 1/8

5mm Infrared LED,T-1 3/4

MODEL NO : SIR333C/H0

■ Features :

- High radiant intensity
- Peak wavelength $\lambda_p=875\text{nm}$
- View angle 30°
- High reliability
- Low forward voltage

■ Description :

- EVERLIGHT's Infrared Emitting Diode (SIR333C/H0) is a high intensity diode, molded in a water clear plastic package.

The device is spectrally matched with phototransistor, photodiode and infrared receiver module.

■ Applications :

- Free air transmission system
- Optoelectronic switch
- Infrared remote control units with high power requirement
- Floppy disk drive


PART NO.	CHIP	LENS COLOR
	MATERIAL	
SIR	GaAlAs	Water clear



5mm Infrared LED,T-1 3/4

MODEL NO : SIR333C/H0

■ Package Dimensions :

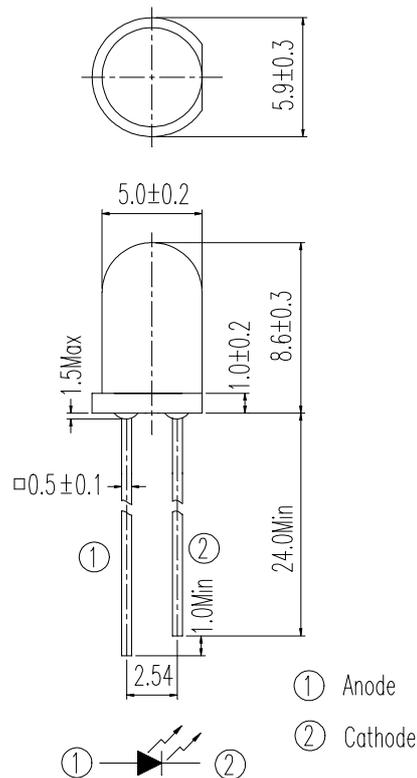

■ Notes :

- 1.All dimensions are in millimeter.
- 2.General tolerance : ± 0.1 mm.
- 3.Protruded resin under flange 1.5 mm Max.
- 4.Lead spacing is measured where the lead emerge from the package.
- 5.Lens color : Water clear.
- 6.Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
- 7.These specification sheets include materials protected under copyright of EVERLIGHT corporation . Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.
- 8.When using this product , please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets. EVERIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.



5mm Infrared LED,T-1 3/4

MODEL NO : SIR333C/H0

■ Absolute Maximum Ratings at $T_A = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit	Notice
Continuous Forward Current	I_F	100	mA	
Peak Forward Current Pulse width=100 μ s,Duty cycle=1%	I_{FP}	1.0	A	
Reverse Voltage	V_R	5	V	
Operating Temperature	Topr	-25 ~ +85	$^\circ\text{C}$	
Storage Temperature	Tstg	-40 ~ +85	$^\circ\text{C}$	
Soldering Temperature	Tsol	260	$^\circ\text{C}$	4mm from mold body less than 5 seconds
Power Dissipation at(or below) 25 $^\circ\text{C}$ Free Air Temperature	Pd	150	mW	

■ Electronic Optical Characteristics :

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Radiant Intensity	Ee	5.6	11	----	mW/sr	$I_F=20\text{mA}$
		----	50	----		$I_F=100\text{mA}, t_p=100 \mu\text{s}, t_p/T=0.01$
		----	450	----		$I_F=1\text{A}, t_p=100 \mu\text{s}, t_p/T=0.01$
Peak Wavelength	λ_P	----	875	----	nm	$I_F=20\text{mA}$
Spectral Bandwidth	$\Delta \lambda$	----	80	----	nm	$I_F=20\text{mA}$
Forward Voltage	V_F	----	1.3	1.6	V	$I_F=20\text{mA}$
		----	1.4	1.8		$I_F=100\text{mA}, t_p=100 \mu\text{s}, t_p/T=0.01$
		----	2.6	4.0		$I_F=1\text{A}, t_p=100 \mu\text{s}, t_p/T=0.01$
Reverse Current	I_R	----	----	10	μA	$V_R=5\text{V}$
View Angle	$2\theta_{1/2}$	----	30	----	deg	$I_F=20\text{mA}$



5mm Infrared LED,T-1 3/4

MODEL NO : SIR333C/H0

■ Typical Electrical/Optical/Characteristics Curves

Fig.1 Forward Current vs. Ambient Temperature

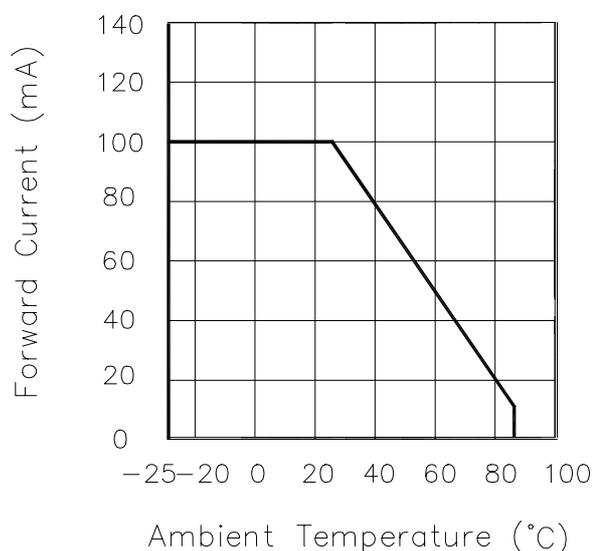


Fig.2 Spectral Distribution

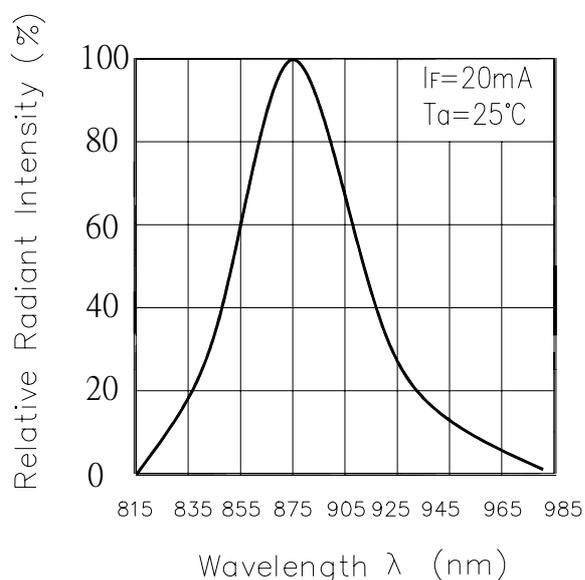


Fig.3 Peak Emission Wavelength vs. Ambient Temperature


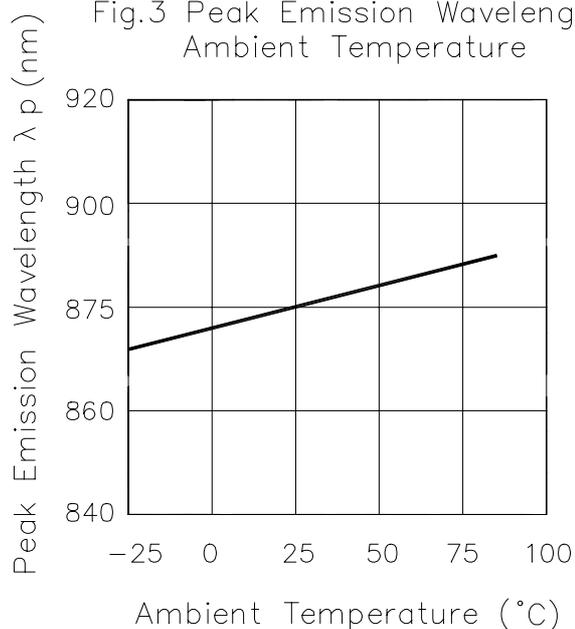


Fig.4 Forward Current vs. Forward Voltage



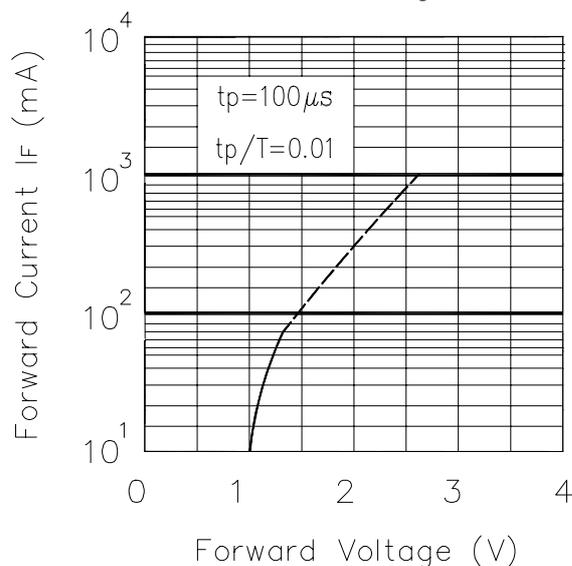

5mm Infrared LED,T-1 3/4

MODEL NO : SIR333C/H0

■ Typical Electrical/Optical/Characteristics Curves

Fig. 5 Relative Intensity vs. Forward Current

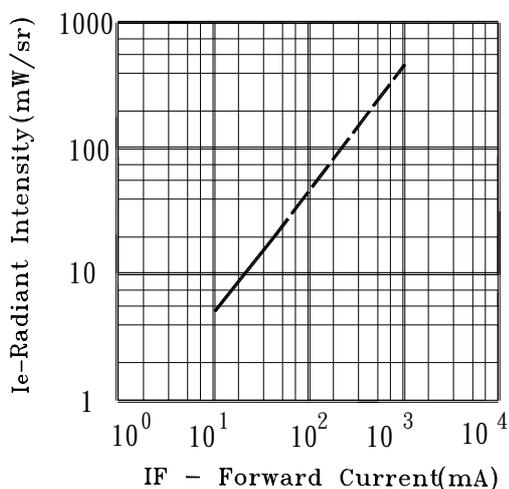


Fig. 6 Relative Radiant Intensity vs. Angular Displacement

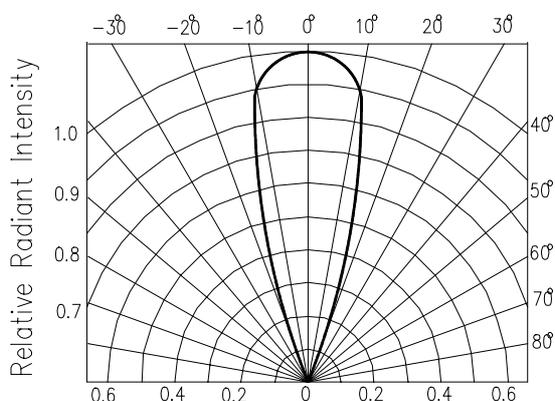


Fig. 7 Relative Intensity vs. Ambient Temperature (°C)


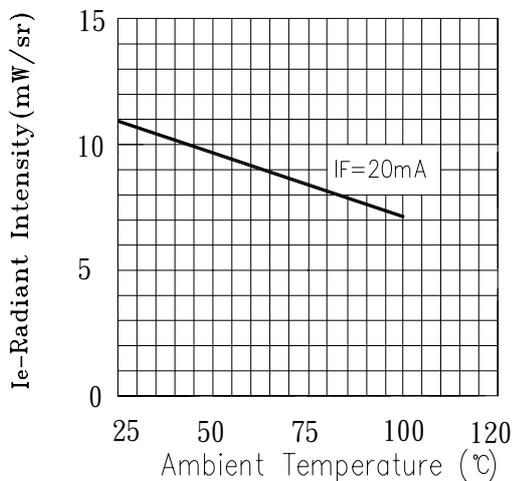


Fig. 8 Forward Current vs. Ambient Temperature (°C)



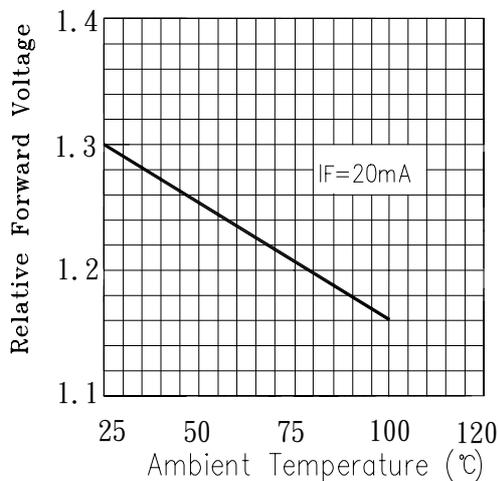

EVERLIGHT ELECTRONICS CO., LTD.

DEVICE NUMBER : DIS-033-071 REV : 1.1
 ECN : _____ PAGE : 6/8

5mm Infrared LED,T-1 3/4


MODEL NO : SIR333C/H0

■ Reliability Test Item And Condition

The reliability of products shall be satisfied with items listed below.

Confidence level:90%

LTPD:10%

NO.	Item	Test Conditions	Test Hours/ Cycles	Sample Sizes	Failure Judgement Criteria	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	10 secs	22 pcs		0/1
2	Temperature Cycle	H : +85°C 30 mins  L : -55°C 30 mins	50 cycles	22 pcs	$I_R \geq U \times 2$ $E_e \leq L \times 0.8$ $V_F \geq U \times 1.2$	0/1
3	Thermal Shock	H : +100°C 5 mins  L : -10°C 5 mins	50 cycles	22 pcs	U :Upper specification limit L :Lower specification limit	0/1
4	High Temperature Storage	TEMP. : +100°C	1000 hrs	22 pcs		0/1
5	Low Temperature Storage	TEMP. : -55°C	1000 hrs	22 pcs		0/1
6	DC Operating Life	$I_F = 20\text{mA}$	1000 hrs	22 pcs		0/1
7	High Temperature / High Humidity	85°C / 85% R.H.	1000 hrs	22 pcs		0/1

5mm Infrared LED,T-1 3/4


MODEL NO : SIR333C/H0

■ Test Method For Power :

Condition : $I_F=20\text{ mA}$

Test Item : Radiant Intensity

Unit : mW/sr

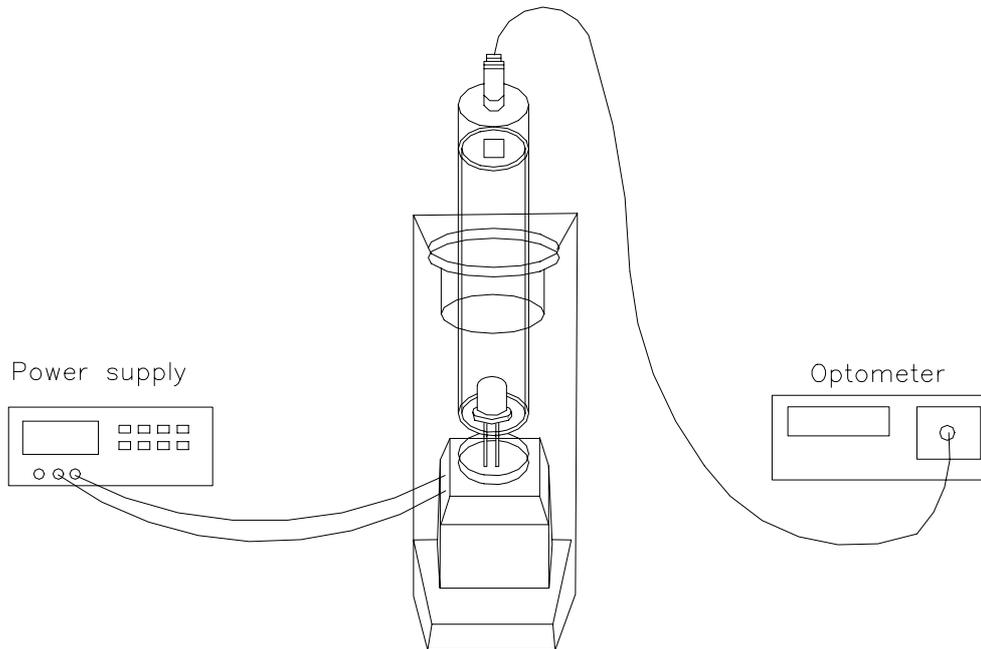

■ To Distinguish Intensity:

Condition: $I_F=20\text{mA}$

unit : mW/sr

Bin Number	L	M	N	P
Min	5.60	7.80	11.0	15.0
Max	8.90	12.5	17.6	24.0




EVERLIGHT ELECTRONICS CO., LTD.

DEVICE NUMBER : DIS-033-071 REV : 1.1
ECN : _____ PAGE : 8/8

5mm Infrared LED,T-1 3/4

MODEL NO : SIR333C/H0

■ Packing Specifications

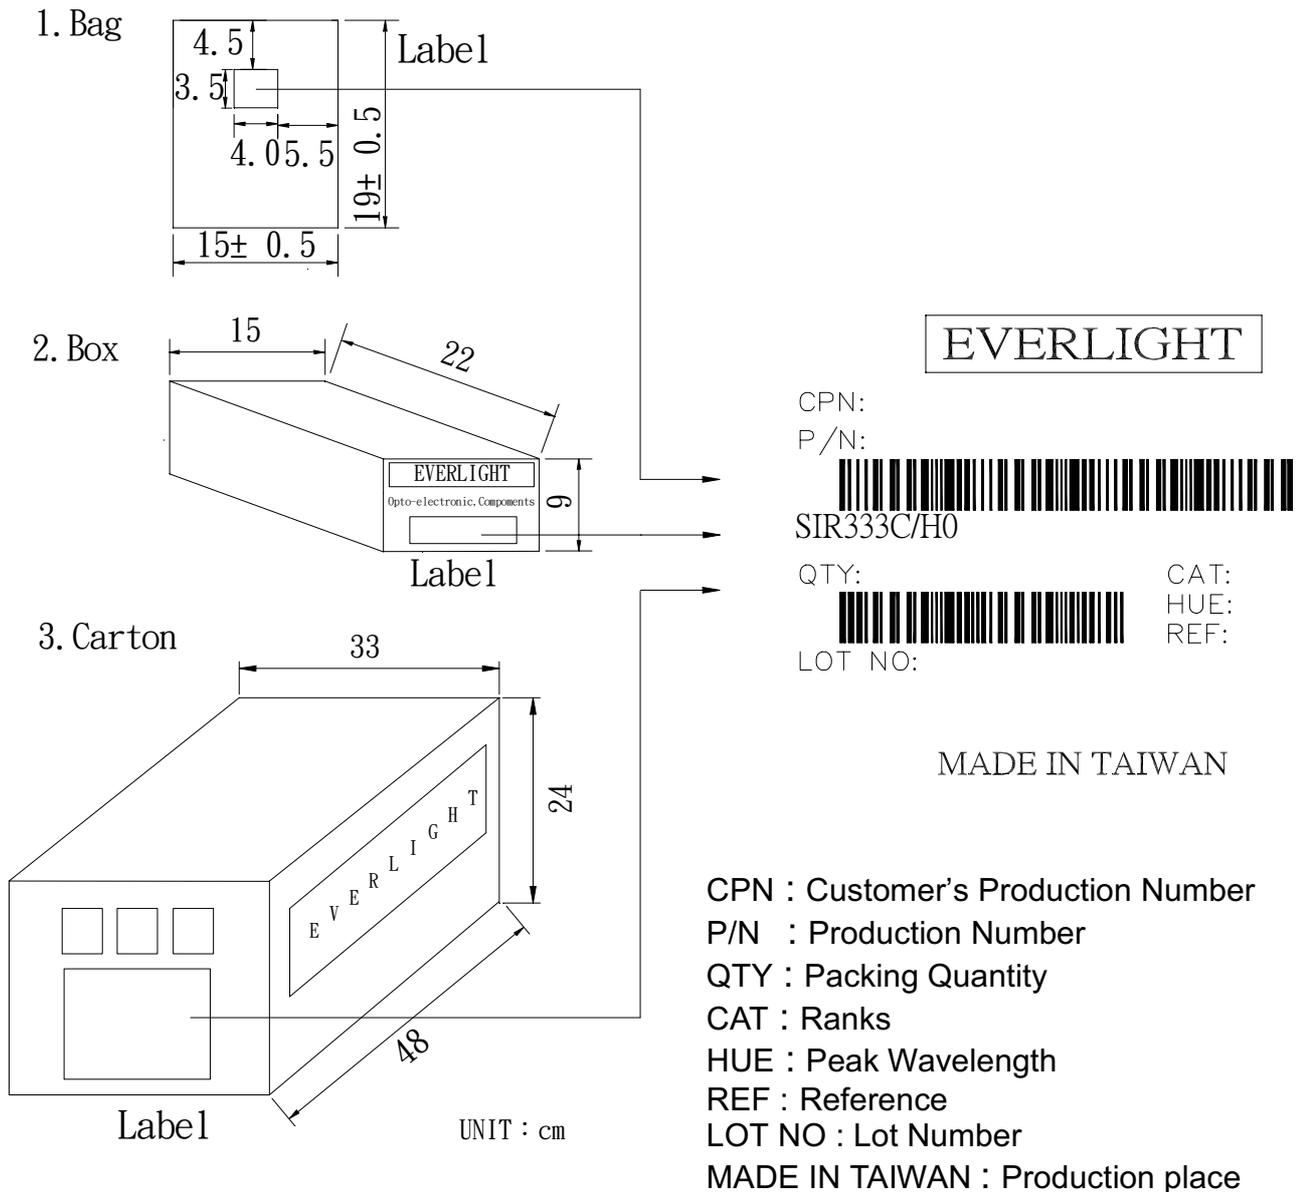

■ Packing Quantity Specification

- 500Pcs/1Bag · 6 Bags/1Box
- 10 Boxes/1Carton