





# EVERLIGHT ELECTRONICS CO., LTD.

DEVICE NUMBER : CDRX-810-001      REV : 1  
ECN : \_\_\_\_\_      PAGE : 1/7

## Interrupter

MODEL NO : ITR8102/F5

---

### ■ Features :

- Fast response time
- High analytic
- High sensitivity

### ■ Description :

The **ITR8102/F5** consist of an infrared emitting diode and an NPN silicon phototransistor, encased side-by-side on converging optical axis in a black thermoplastic housing. The phototransistor receives radiation from the IRED only. This is the normal situation. But when an object is in between, phototransistor could not receives the radiation. For additional component information, please refer to **IR908-7C** and **PT908-7C**.

### ■ Applications :

- Copier
- Printer
- Switch Scanner
- Opto-electronic Switches

PART NO.	CHIP	LENS COLOR
	MATERIAL	
IR	GaAIAs	Water clear
PT	Silicon	Water clear


---



## Interrupter

MODEL NO : ITR8102/F5

### Package Dimension :

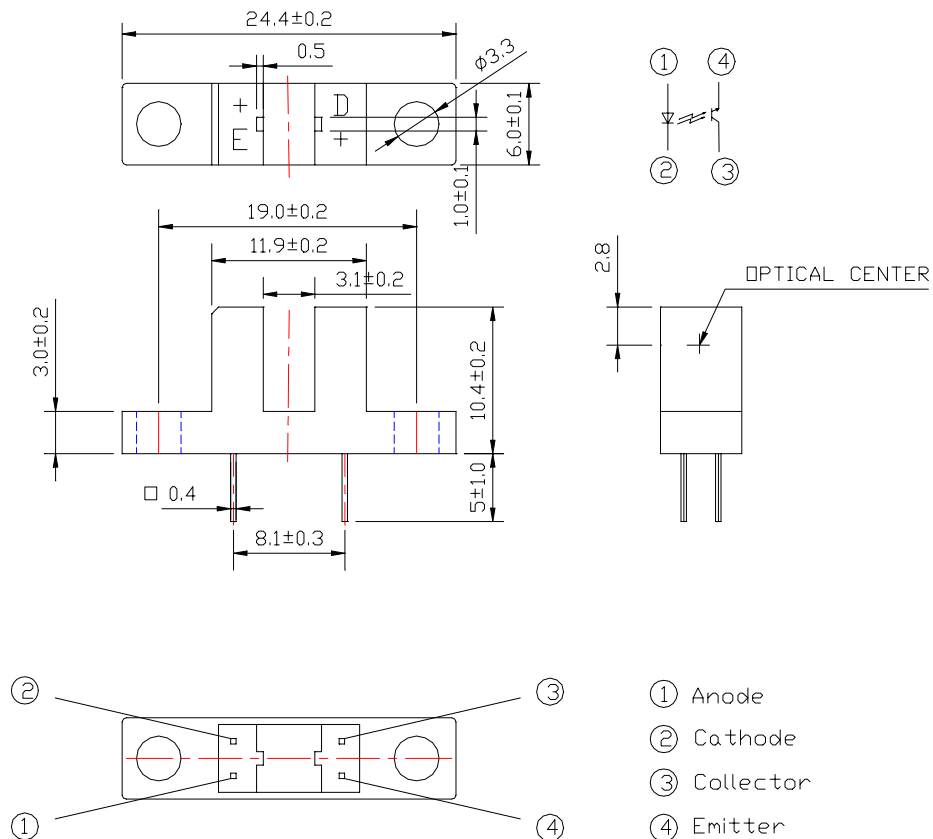

### Notes :

1. All dimensions are in millimeter.
2. General tolerance:  $\pm 0.3$  mm.
3. Lead spacing is measured where the lead emerge from the package.
4. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
5. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.
6. When using this product, please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets. EVERIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.



# EVERLIGHT ELECTRONICS CO., LTD.

DEVICE NUMBER : CDRX-810-001      REV : 1  
 ECN : \_\_\_\_\_      PAGE : 3/7

## Interrupter

MODEL NO : ITR8102/F5

### ■ Absolute Maximum Ratings at T<sub>A</sub> = 25°C

Parameter		Symbol	Rating	Unit
Input	Power Dissipation	P <sub>D</sub>	75	mW
	Reverse Voltage	V <sub>R</sub>	5	V
	Forward Current	I <sub>F</sub>	50	mA
	Peak Forward Current(*1)	I <sub>FP</sub>	1	A
Output	Collect Power Dissipation	P <sub>C</sub>	75	mW
	Collect Current	I <sub>C</sub>	20	mA
	Collector-Emitter Voltage	V <sub>CE</sub>	30	V
	Emitter-Collector Voltage	V <sub>EC</sub>	5	V
Operating Temperature		T <sub>opr</sub>	-25~+85	°C
Storage Temperature		T <sub>stg</sub>	-40~+85	°C
Soldering Temperature(*2)		T <sub>sol</sub>	260	°C

(\*1) Pause width= 100 μs, Duty Cycle=1%      (\*2) t=5 secs

Note: The plumb direction pull must be more than 1000g after PT and IR were assembled.

### ■ Electronic Optical Characteristics at T<sub>A</sub> = 25°C:

Parameter		Symbol	Min.	Typ.	Max.	Unit	Condition
Input	Forward Voltage	V <sub>F1</sub>	-	1.2	1.6	V	I <sub>F</sub> =20mA
		V <sub>F2</sub>	-	1.4	1.85		I <sub>F</sub> =100mA, tp=100 μs, tp/T=0.01
		V <sub>F3</sub>	-	2.6	4.0		I <sub>F</sub> =1A, tp=100 μs, tp/T=0.01
	Reverse Current	I <sub>R</sub>	-	-	10	μA	V <sub>R</sub> =5V
	Peak Wavelength	λ <sub>P</sub>	-	940	-	nm	I <sub>F</sub> =20mA
View Angle		2θ 1/2	-	60	-	Deg	I <sub>F</sub> =20mA
Output	Dark Current	I <sub>CEO</sub>	-	-	100	nA	V <sub>CE</sub> =5V, Ee=0mW/cm <sup>2</sup>
	C-E Saturation Voltage	V <sub>CE(sat)</sub>	-	-	0.4	V	I <sub>C</sub> =0.1mA, I <sub>F</sub> =40mA
Collector Current		I <sub>C(ON)</sub>	0.9	4	15	mA	V <sub>CE</sub> =5V, I <sub>F</sub> =20mA
		I <sub>C(OFF)</sub>	-	-	20	μA	
Response Time	Rise Time	t <sub>R</sub>	-	10	-	μs	V <sub>CE</sub> =5V, I <sub>C</sub> =100 μA , R <sub>L</sub> =100Ω
	Fall Time	t <sub>F</sub>	-	10	-	μs	



## Interrupter

MODEL NO : ITR8102/F5

### ■ Typical Electrical/Optical/Characteristics Curves For IR

Fig. 1 Forward Current vs. Ambient Temperature

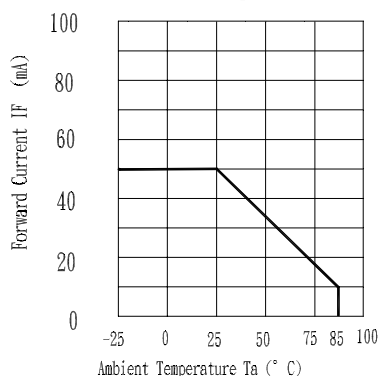


Fig. 2 Spectral Distribution

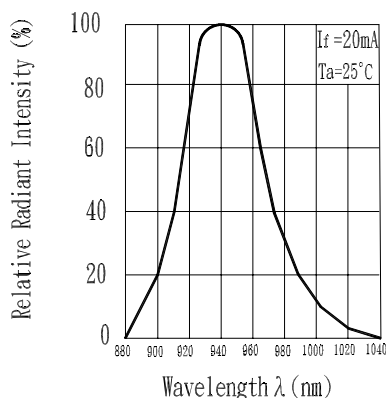


Fig. 3 Peak Emission Wavelength vs. Ambient Temperature

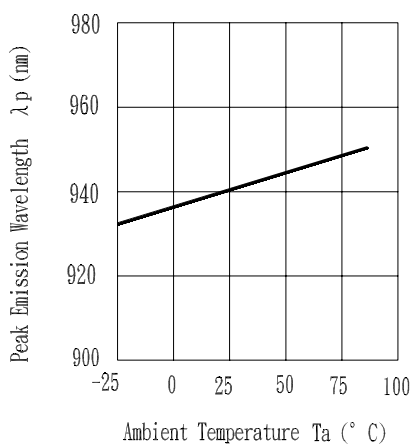


Fig. 4 Forward Current vs. Forward Voltage

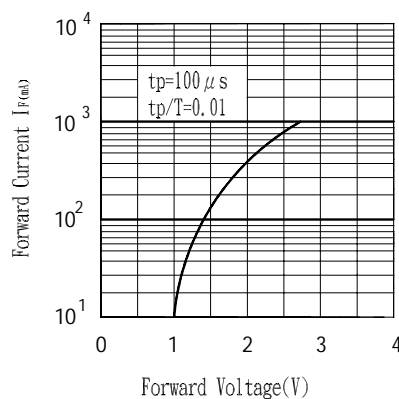


Fig. 5 Relative Intensity vs. Forward Current


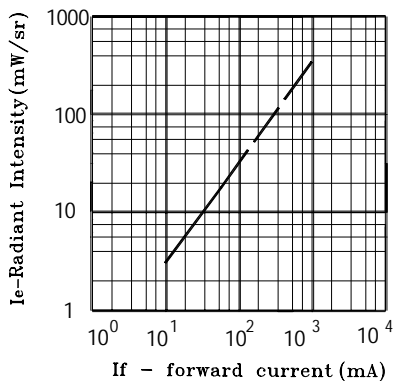


Fig. 6 Relative Radiant Intensity vs. Angular Displacement



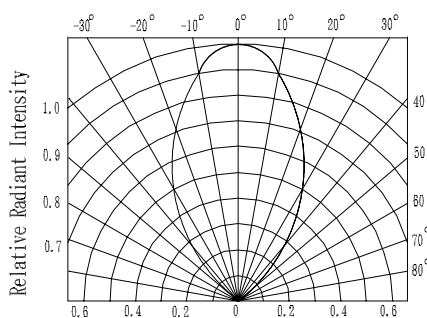

## Interrupter

MODEL NO : ITR8102/F5

### Typical Electrical/Optical/Characteristics Curves For PT

Fig.1 Collector Power Dissipation vs. Ambient Temperature

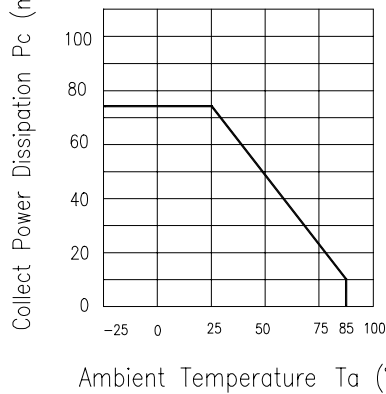


Fig.2 Collector Dark Current vs. Ambient Temperature

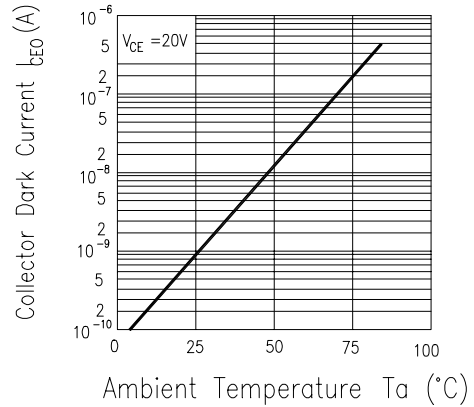


Fig. 3 Relative Collector Current vs. Ambient Temperature

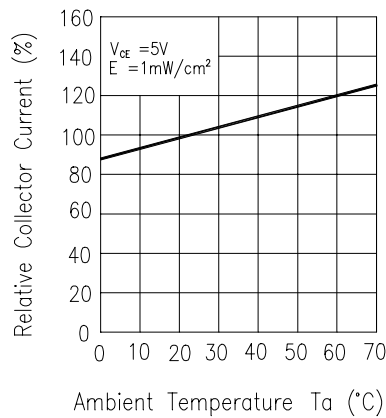


Fig.4 Collector Current vs. Irradiance

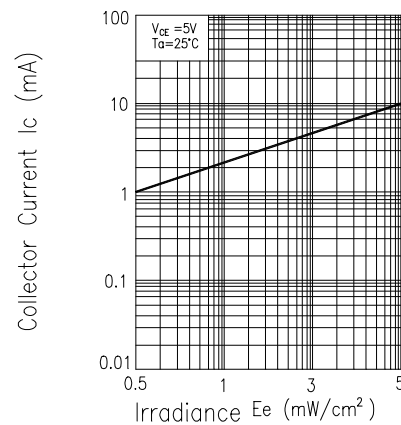


Fig.5 Spectral Sensitivity


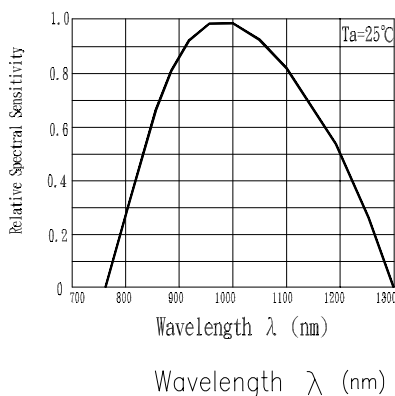


Fig.6 Collector Current vs. Collector-Emitter Voltage



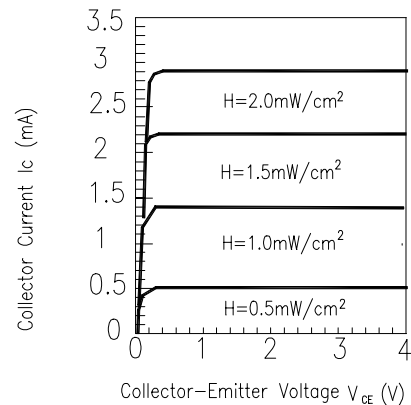

## Interrupter

MODEL NO : ITR8102/F5

### ■ Reliability Test Item And Condition

The reliability of products shall be satisfied with items listed below.

Confidence level:90%

LTPD:10%

NO.	Item	Test Conditions	Test Hours/ Cycle	Sample Size	Failure Judgement Criteria	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	5 secs	22 pcs	$I_{c(on)} \leq L \times 0.8$  L :Lower specification limit	0/1
2	Temperature Cycle	H : +85°C    30 mins $\updownarrow$ 5 mins $\updownarrow$ L : -55°C    30 mins	50 cycles	22 pcs		0/1
3	Thermal Shock	H : +100°C    5 mins $\updownarrow$ 10 secs $\updownarrow$ L : -10°C    30 mins	50 cycles	22 pcs		0/1
4	High Temperature Storage	TEMP. : +100°C	1000 hrs	22 pcs		0/1
5	Low Temperature Storage	TEMP. : -55°C	1000 hrs	22 pcs		0/1
6	DC Operating Life	V <sub>CE</sub> =5V I <sub>F</sub> =20mA	1000 hrs	22 pcs		0/1
7	High Temperature / High Humidity	85°C / 85% R.H.	1000 hrs	22 pcs		0/1




# EVERLIGHT ELECTRONICS CO., LTD.

DEVICE NUMBER : CDRX-810-001      REV : 1  
ECN : \_\_\_\_\_      PAGE : 7/7

## Interrupter

MODEL NO : ITR8102/F5

### ■ Packing Specifications

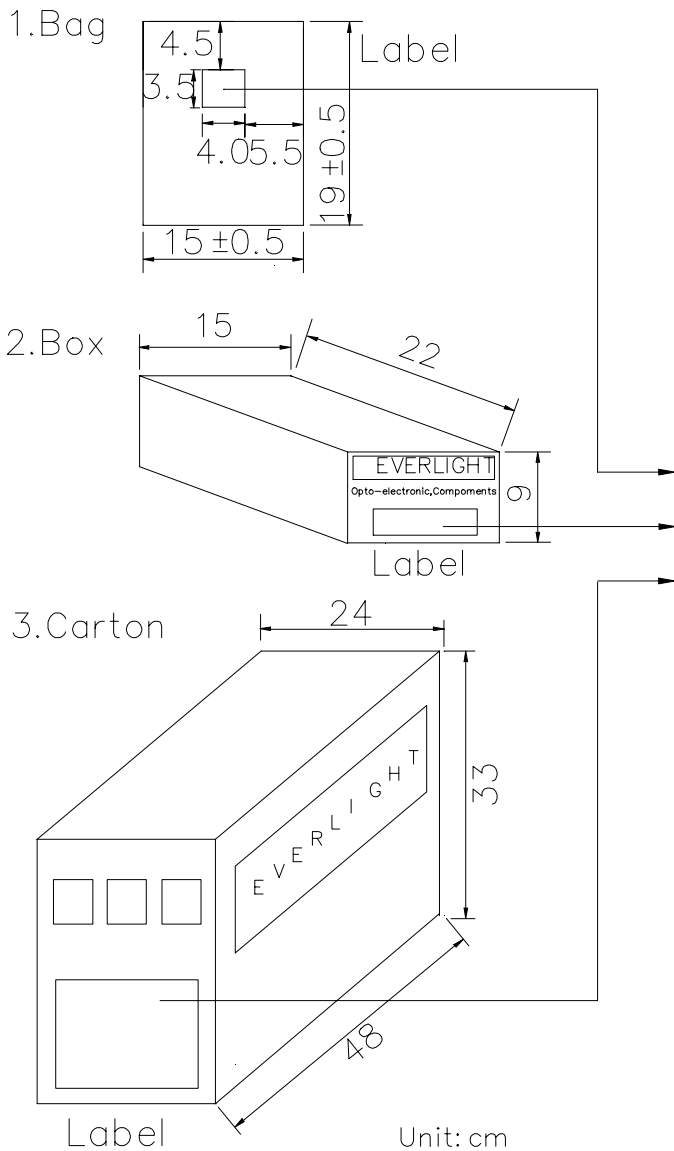

CPN:

P/N:



ITR8102/F5

QTY:



CAT:

HUE:

REF:

LOT NO:

CPN : Customer's Production Number

P/N : Production Number

QTY : Packing Quantity

CAT : Ranks

HUE : Peak Wavelength

REF : Reference

LOT NO : Lot Number

### ■ Packing Quantity Specification

1.150Pcs/1Bag

2.4Bags/1Box

3.10Boxes/1Carton